

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 15538 (2004): Abrasive grains - Test sieving machines
[PGD 9: Abrasives]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक
अपघर्षी ग्रेन — परीक्षण छनाई मशीनें

Indian Standard
ABRASIVE GRAINS — TEST SIEVING MACHINES

ICS 19.120; 25.100.70

© BIS 2004

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

NATIONAL FOREWORD

This Indian Standard which is identical with ISO 9284 : 1992 'Abrasive grains — Test-sieving machines' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendations of the Abrasives Sectional Committee and approval of the Medical Instruments, General and Production Engineering Division Council.

The text of the ISO Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.
- b) Comma (,) has been used as a decimal marker in the International Standard, while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

CROSS REFERENCES

In this adopted standard reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards which are to be substituted in their places are listed below along with their degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 2591-1 : 1988 Test sieving — Part 1 : Methods using test sieves of woven wire cloth and perforated metal plate	IS 1607 : 1977 Methods for test sieving (<i>first revision</i>)	Technically equivalent
ISO 6344-1 : 1998 Coated abrasives — Grain size analysis — Part 1 : Grain size distribution test	IS 15287 (Part 1) : 2003 Coated abrasives — Grain size analysis: Part 1 Grain size distribution test	Identical
ISO 6344-2 : 1998 Coated abrasives — Grain size analysis — Part 2 : Determination of grain size distribution of macrogrits P12 to P220	IS 15287 (Part 2) : 2003 Coated abrasives — Grain size analysis: Part 2 Determination of grain size distribution of macrogrits P12 to P220	do
ISO 8486-1 : 1996 Bonded abrasives — Determination and designation of grain size distribution — Part 1 : Macrogrits F4 to F220	IS 15288 (Part 1) : 2003 Bonded abrasives — Determination and designation of grain size distribution: Part 1 Macrogrits F4 to F220	do

Where there are no corresponding Indian Standards for the International Standards referred in this Indian Standard, reference to the relevant International Standards may be made.

For the purpose of deciding whether a particular requirement of this standards is complied with the final value observed or calculated, expressing the result of a test or analysis shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this Standard.

Indian Standard

ABRASIVE GRAINS — TEST SIEVING MACHINES

1 Scope

This International Standard specifies the operational and technical requirements, and gives guidance on the installation, checking and maintenance of test-sieving machines. These machines are used for determining the size distribution of bonded and coated abrasive macrograins.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 2591-1:1988, *Test sieving — Part 1: Methods using test sieves of woven wire cloth and perforated metal plate*.

ISO 6344-1:—¹⁾, *Coated abrasives — Grain size analysis — Part 1: Definitions, designation and principle*.

ISO 6344-2:—¹⁾, *Coated abrasives — Grain size analysis — Part 2: Determination of grain size distribution of macrogrits P 12 to P 220*.

ISO 8486:1986, *Bonded abrasives — Grain size analysis — Designation and determination of grain size distribution of macrogrits F4 to F220*.

3 Operational requirements

Under defined operating conditions, mechanical test sieving can produce results comparable with those obtained by manual sieving.

The results obtained by using test-sieving machines shall be reproducible and shall comply with the requirements specified in ISO 8486, ISO 6344-1, ISO 6344-2 and ISO 2591-1.

The reproducibility of the determination of the grain size distribution of abrasive grains by means of sieving is assured only when the appropriate test-sieving machines, test sieves and operating instructions are used.

4 Technical description

Examples of test-sieving machines are illustrated in figure 1a) and figure 1b).

Test-sieving machines usually consist of the following basic components:

- a) support and frame;
- b) electric motor;
- c) gear drive for the conversion of the rotary motion of the motor into the specified eccentric rotary motion of the nest of sieves and into the tapping action;
- d) switch which is actuated by means of a time switch;
- e) tapper for the execution of the vertical strokes (which are specified for a given unit of time) on the cover of the nest of sieves;
- f) retainer for the bottom pan and nest of sieves, which allows them to move in the specified manner;
- g) cover for the sieves, fitted with a funnel-shaped insert with a plug (usually made of cork) on which the tapper strikes.

In addition the following is necessary for the operation of test-sieving machines:

1) To be published.

- h) base plate;
- i) a nest of five test sieves.
- j) bottom pan.

5 Technical requirements

5.1 Nest of test sieves and sieve frames

The nest of test sieves shall be mounted in the sieving machine in such a way that the prescribed movements are possible without any obstruction. Attention shall be paid to the manufacturer's recommendations.

The sieve frames of the test sieves shall have the following dimensions:

- diameter, 200 mm;
- height, 50 mm.

The nest of test sieves to be used for a particular type of macrograin shall be as specified in the applicable standard.

5.2 Sieving time

The test-sieving machines shall be provided with a time switch to guarantee that sieving is carried out for the prescribed time.

6 Installation of test-sieving machines

The test-sieving machine shall be fixed on a suitable base-plate of sufficient mass in such a way that external vibrations cannot reach the machine.

The test-sieving machine shall be installed to be horizontal.

As an example, the test-sieving machine, type A [see figure 1a)], shall be fixed on a concrete base-plate having a width of at least 625 mm, a depth of 500 mm and a height of 550 mm. For the design of the concrete base-plate as well as for the arrangement of the assembly bolts, see figure 2.

The concrete base-plate should be placed on a vibration-absorbing board, made, for example, of hard felt, which serves also to compensate for unevenness of the ground.

The ground shall be free from vibrations, i.e. it should be natural soil. Where it is not possible to meet this requirement, the test-sieving machine should be installed in such a way that the forces and moments which occur during the operation of the machine are transmitted via the load-bearing structure to the foundations.


If an acoustic cabinet is used, it shall not be attached either to the sieving machine or to the concrete block.

7 Checking of test-sieving machines


The efficiency of test-sieving machines shall be checked at appropriate intervals. In particular, the performance of the tapper and the precision of the time switch shall be checked.

8 Maintenance of test-sieving machines

In order to maintain the efficiency and operational reliability of test-sieving machines, it is recommended that the manufacturer's instructions concerning maintenance are followed.

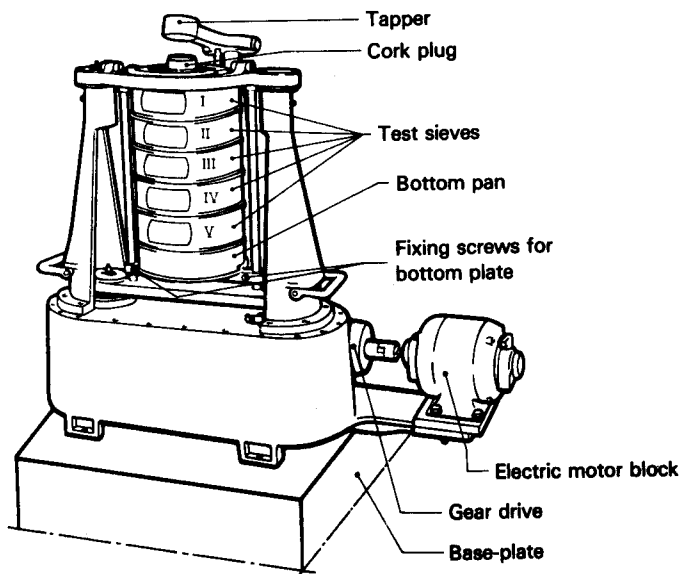

a) Type A

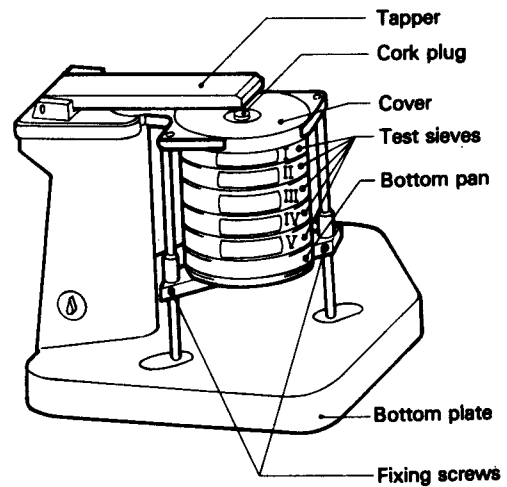

b) Type B

NOTE — This figure illustrates RO-TAP test-sieving machines, type A and type B.

RO-TAP is the trade-name of a specific test-sieving machine. For further information contact your national standards organization.

This information is given for the convenience of users of this International Standard and does not constitute an endorsement by ISO of the product named.

Figure 1 — Examples of test-sieving machines

Dimensions in millimetres

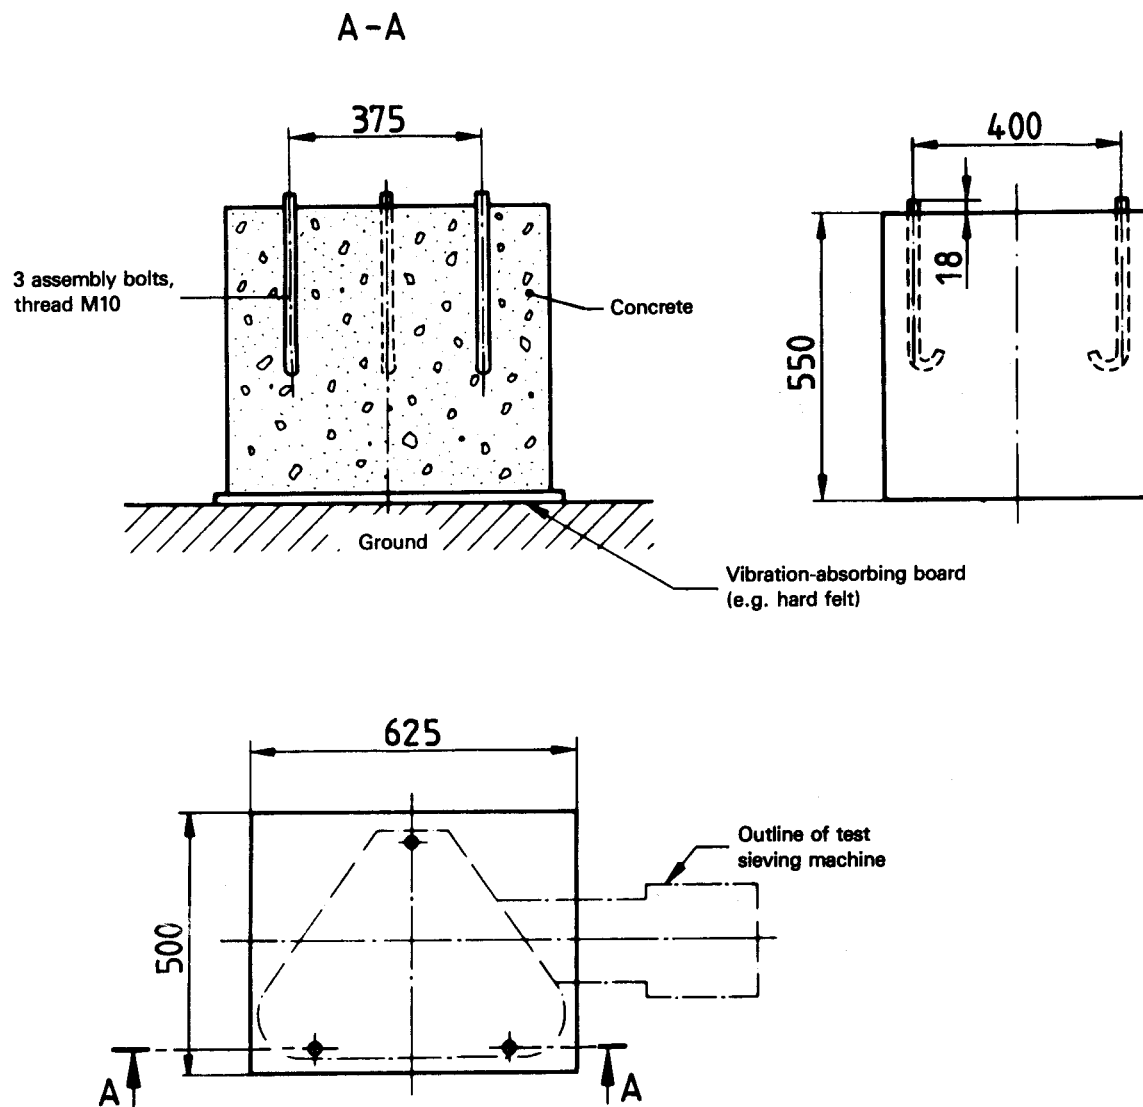


Figure 2 — Base-plate and mating dimensions for the assembly of test-sieving machines, type A

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards : Monthly Additions'.

This Indian Standard has been developed from Doc : No. **MGP 09 (0426)**.

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002
Telephones : 2323 0131, 2323 3375, 2323 9402 Website : www.bis.org.in

Regional Offices :

Telephones

Central	: Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110 002	{ 2323 7617 2323 3841
Eastern	: 1/14 C. I. T. Scheme VII M, V. I. P. Road, Kankurgachi KOLKATA 700 054	{ 2337 8499, 2337 8561 2337 8626, 2337 9120
Northern	: SCO 335-336, Sector 34-A, CHANDIGARH 160 022	{ 260 3843 260 9285
Southern	: C. I. T. Campus, IV Cross Road, CHENNAI 600 113	{ 2254 1216, 2254 1442 2254 2519, 2254 2315
Western	: Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400 093	{ 2832 9295, 2832 7858 2832 7891, 2832 7892

Branches: AHMEDABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE.
FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR.
LUCKNOW. NAGPUR. NALAGARH. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM.
VISAKHAPATNAM.